



508-SW SWITCHING AMPLIFIER

Capteura® Multiple Channel Switching Amplifier

Capteura® 508-SW Switching Amplifier

Where multiple channels are required at lower speeds, the new low cost multiple channel signal conditioner returns very high linearity & stability of individual channels. The system eliminates the additional cost of any external A/D converter cards while offering direct interface to PLC controllers via Ethernet. The compact switching configuration is ideal for a large number of industrial process displacement, gap and bore measurements.

- 8 displacement channels or 4 gap calibrations stored internally
- Integral 18 bit Analog to Digital Converter
- Compatible with all Capacitec Probes
- Microprocessor based




Output view of 3 channel system

- Linearity: 0.05% FS
- Switching frequency up to 500 Hz (e.g. 5 channels/100 Hz per channel)
- USB powered (standard)
- Battery powered Bluetooth 4.0 (optional)
- Ethernet with external power supply required (5VDC @ 250mA)
- Output Engineering units - Serial string
- Ethernet IP Software (optional)
- Command Set Software (optional)

System Specifications

The **Capteura 508-SW Switching Amplifier Systems** are configured according to user-specific needs. They can be built in several different configurations of 1 to 8 channels.

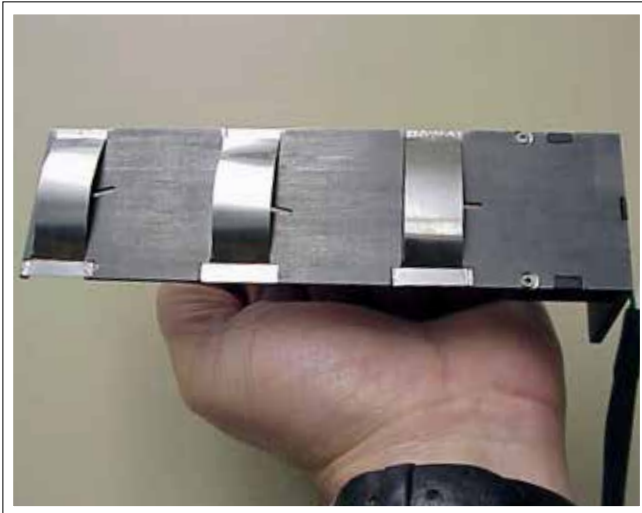

3 displacement sensor assembly



3 sensor input view with TRW/Souriau connectors

Model 520 Amplifier Specifications

Size (with enclosure)	9.5" X 4.25" X 1.25" (241mm X 108mm X 32mm)
Bandwidth	500Hz (e.g. 5 channels/100 Hz per channel)
Linear Range	Typically 2/3 of probe's sensor diameter
Temperature Stability	110 ppm/°C temperature coefficient from 0 to 60°
Linearity	± 0.05% of full scale or better to 2/3 of sensor diameter
ESD	Electrostatic discharge protection of sensor, guard, and electronic ground
Power Consumption	Ethernet or Bluetooth < 1.2 watt
Input	Connector options: TRW (3 channel), Souriau (8 channel)
Power Options	AC wall adapter 5VDC or USB power: 5VDC @ 250mA
Extension Cable	10 foot (3.05m) cable length change affects the output by less than 0.2%, to 32.8 feet (10m)
Output	Digital only: USB, Ethernet or Bluetooth
Output Type	Serial