

HPC-40

HPC-40 Series Cylindrical Probes for Precision Dimensional Measurement


Capacitec's HPC non-contact probes are our most popular line of capacitive sensors. The sensor and guard elements are provided in a protective metal case. The HPC family of probes supports cable lengths of up to 10 meters in standard applications.

Built in wrench flats allow for easy installation and adjustments. A set screw or split clamp housing typically holds the assembly in place for easy installation and adjustments. Capacitec also offers custom configurations. Please consult the Capacitec technical support team for more information.



These probes have the largest displacement to sensor diameter ratio in the industry, yielding twice the linear range of competitors.

HPC cylindrical probes are available in a wide operational temperature range for precise measurements from cryogenic to 1000°C.

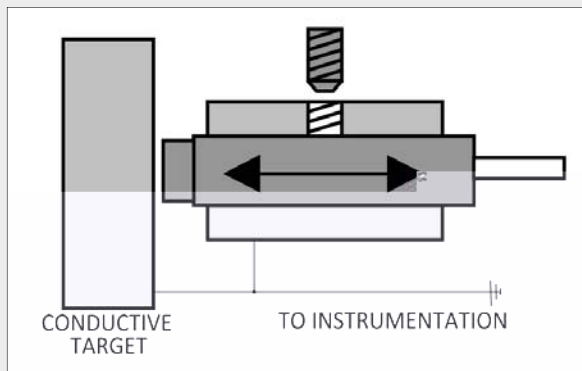


Adjust probe to desired distance and set screw in place



Complete Standard Capacitec HPC family

Standard Temperature Probes

Temperature Ranges A & E

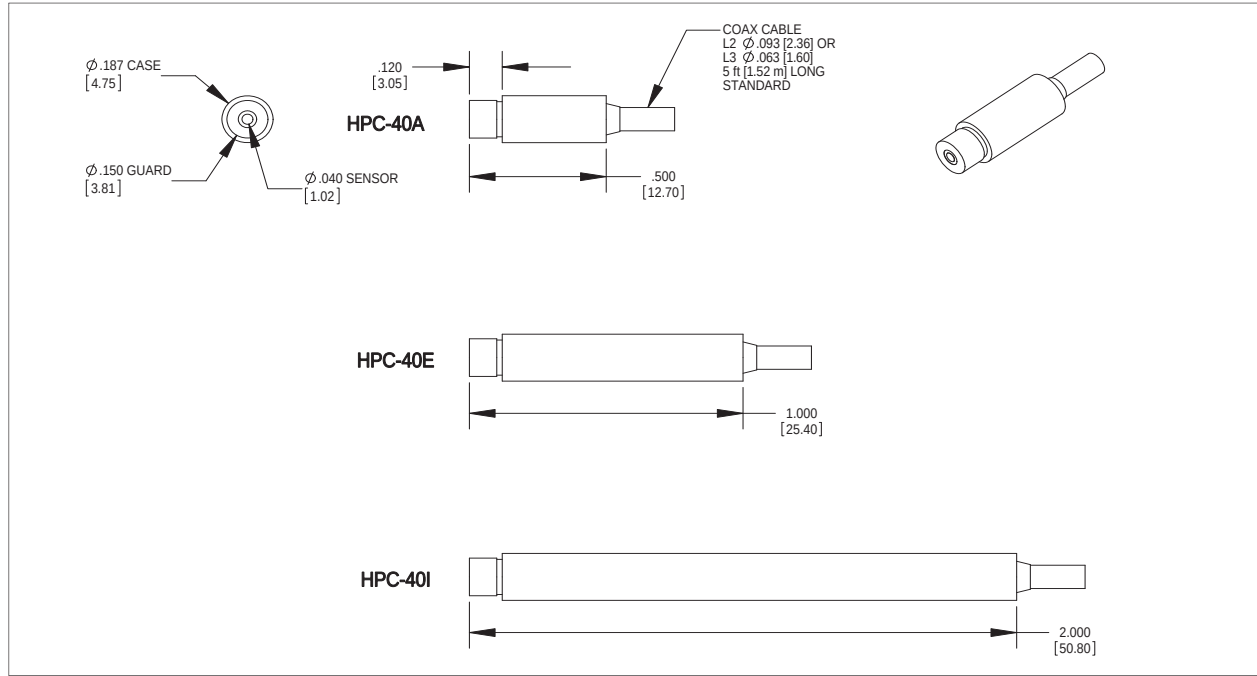

Linear Range		0.020" [0.51]
Maximum Range		0.040" [1.02]
Material (Case, Guard and Sensor)		303 stainless steel
Standard Probe Lengths	A	0.500" [12.70]
	E	1.000" [25.40]
	I	2.000" [50.80]
	Custom	Custom lengths B to H available B .625" [15.88], C .750" [19.05], D .875" [22.23], F 1.250" [31.75], G 1.500" [38.10], H 1.750" [44.45], please consult factory
Temperature Ranges	A	32°F [0°C] to 302°F [150°C], please consult factory for cryogenic
(Continuous Use)	E	-100°F [-73°C] to 400°F [205°C], please consult factory for cryogenic
Sensor OD		0.040" [1.02]
Case OD		0.187" [4.75]
Connector Options		Microdot, BNC or MCX, (microdot and MCX not compatible with I2 cable)
Cable Options OD		L2 0.093" [2.36], L3 0.063" [1.60] or I2 0.125" [3.18], all cable must not be cut or spliced
Dip Coating		Optional protective epoxy dip coating available
Calibration	NIST Traceable	20 point archived calibration record of nominal displacement versus voltage standard Several sensitivities available
Mounting Hole		0.187" +0.001/-0.000, [4.75 +0.051/-0.000]

Ordering Format



HPC – 40												X	-	X	-	XX	-	XX	-	X	-	X
PROBE LENGTH		OPERATING TEMPERATURE		CABLE TYPE		CABLE LENGTH		CONNECTOR TYPE		DIP COATING												
A - .500" (12.70)	A - 32 to 302°F (0 to 150°C)	L2 - .093" coax (2.36)	5 - 5' Standard (1524)	M - 10-32 Microdot	D - For dip coating (only available for A and E temperature probes) Adds .002" (0.05)																	
B - .625" (15.88)																						
C - .750" (19.05)	E - -100 to 400°F (-73 to 205°C)	L3 - .063" coax (1.60)	X - Other in ft.	MCX - MCX	Leave blank for no coating																	
D - .850" (21.59)																						
E - 1.000" (25.40)																						
F - 1.250" (31.75)																						
G - 1.500" (38.10)																						
H - 1.750" (44.45)																						
I - 2.000" (50.80)																						

Specify Beads or Over Braid if Desired

(DIMENSIONS) IN MILLIMETERS



Specify Beads or Over Braid if Desired

(DIMENSIONS) IN MILLIMETERS

EXAMPLE: HPC-40E-E-L3-5-B-D

HPC-40 with

- 400°F [205°C] Max temperature
- Dip coating option

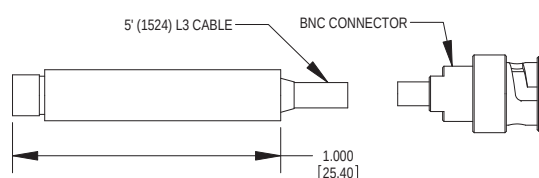

US HEADQUARTERS

Capacitec, Inc.
87 Fitchburg Road
P.O. Box 819
Ayer, Massachusetts 01432
USA
TEL: 978-772-6033
FAX: 978-772-6036
email: sales@capacitec.com
www.capacitec.com

EUROPEAN HEADQUARTERS

Capacitec Europe
16, rue Séjourné
94044 CRETEIL cedex
FRANCE
TEL: 33 1 43 39 48 68
FAX: 33 1 49 80 07 49
email: eurosales@capacitec.com
http://fr.capacitec.com